



AMERICAN FLAMECOAT INC.

520 Eagleton Downs Drive - D
Pineville, NC 28134
O: 704.405.2550
F: 704.543.9772
www.americanflamecoat.com

Client:

ARTE NV
INDUSTRIEZONE "DE WAERDE"
SENATOR A. JEURISSENLAAN 1210
BE-3520 ZONHOVEN, BELGIUM

PO#: ARTE NV FALL 2018
Test Report No: 67017-7
Date: 09.25.2018

The sample submitted by the client as: ARTE nv / MOOOI – (PRINTED NON WOVEN) –
MO2011 – MO2021
(ADHERED)

DATE OF RECEIPT: 09.18-2018

TESTING PERIOD: 8 DAYS

TEST REQUESTED: The submitted sample was tested for flammability in
Accordance with the procedures outlined in ASTM E-84-98.

SIGNED





AMERICAN FLAMECOAT INC.

520 Eagleton Downs Drive - D
Pineville, NC 28134
O: 704.405.2550
F: 704.543.9772
www.americanflamecoat.com

Client:
ARTE NV
INDUSTRIEZONE "DE WAERDE"
SENATOR A. JEURISSENLAAN 1210
BE-3520 ZONHOVEN, BELGIUM

Date: 09.25.2018

INTRODUCTION:

This report presents test results of Flame Spread and Smoke Developed Value per ASTM E-84-98. The report also includes Material Identification, Method of Preparation, Mounting and Conditioning of the specimens.

The tests were performed in accordance with the specifications set forth in ASTM E-84-98, Standard Test Method for Surface Burning Characteristics of Building Materials, both as to equipment and test procedures. This test procedure is similar to UL-723, ANSI NO. 2.5, NFPA No. 255 and UBC 42-1.

The test results cover two parameters: Flame Spread and Smoke Developed Values during the 10-minute fire exposure. Inorganic cement board and red oak flooring are used as comparative standards and their responses are assigned arbitrary values of 0 and 100 respectively.

PREPARATION AND CONDITIONING:

The test sample, identified as ARTE nv / MOOOI – (PRINTED NON WOVEN) – MO2011 – MO2021 was prepared by adhering the material to 5/8" gypsum board glued using Arte clear Pro-5 wallcovering adhesive. This method of sample preparation is described in ASTM E2404-15A, standard practice.

TEST PROCEDURE: Adhered

The tunnel was thoroughly pre-heated by burning natural gas. When the brick temperature, sensed by a floor thermocouple, had reached the prescribed 105 Fahrenheit +/- 5 Fahrenheit level, the sample was inserted in the tunnel and a test conducted in accordance with the standard ASTM E-84-98 procedures.

The operation of the tunnel was checked by performing a 10-minute test with inorganic board of the day of the test.

This test sample *meets the A.S.T.M. E-84 Standard
This test sample ***meets** the N.F.P.A. LIFE SAFETY CODE 101.



AMERICAN FLAMECOAT INC.

520 Eagleton Downs Drive - D
Pineville, NC 28134
O: 704.405.2550
F: 704.543.9772
www.americanflamecoat.com

Client:
ARTE NV
INDUSTRIEZONE "DE WAERDE"
SENATOR A. JEURISSENLAAN 1210
BE-3520 ZONHOVEN, BELGIUM

Date: 09.25.2018

TEST RESULTS:

The test results, calculated in accordance with ASTM E-84-98 for Flame Spread and Smoke Developed Values are as follows:

Test Specimen: ARTE nv / MOOOI – (PRINTED NON WOVEN) – MO2011 – MO2021

Flame Index = 10
Smoke Developed Value = 130

Observation: Tested Fabric Meets the Requirements for ASTM E-84


Rating: Class A

The National Fire Protection Association Life Safety Code 101, Section 6-5.3, "Interior Wall and Ceiling Finish Classification", has a means of classifying materials with respect to Flame Spread and Smoke Developed when tested in accordance with NFPA 255, "Method of Test of Surface Burning Characteristics of Building Materials", (ASTM E-84)

The classifications are as follows:

Class A Interior Wall & Ceiling Finish:	Flame Spread-	0-25
	Smoke Developed-	0-450
Class A Interior Wall & Ceiling Finish:	Flame Spread-	0-25
	Smoke Developed-	0-450


Client: ARTE nv INTERNATIONAL
Report#: 67017-7
Sample: MOOOI (PRINTED NON WOVEN) (MO2011 | MO2021) - ADHERED

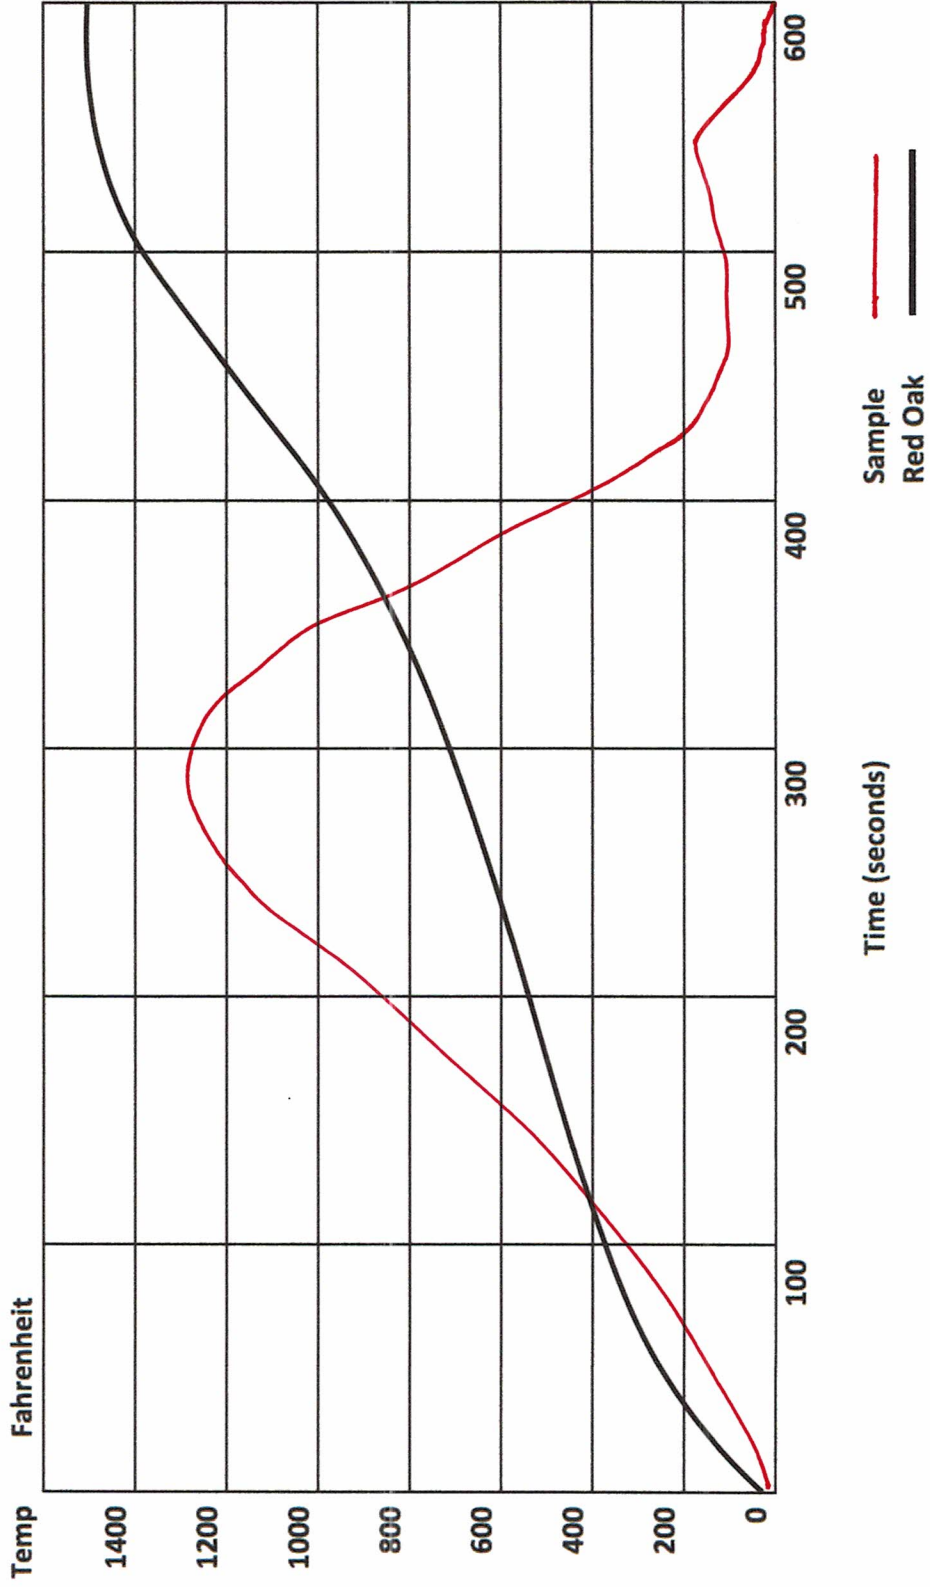

Client: ARTE nv INTERNATIONAL

Report#: 67017-7

Sample: MOOOI (PRINTED NON WOVEN) (MO2011 | MO2021) - ADHERED

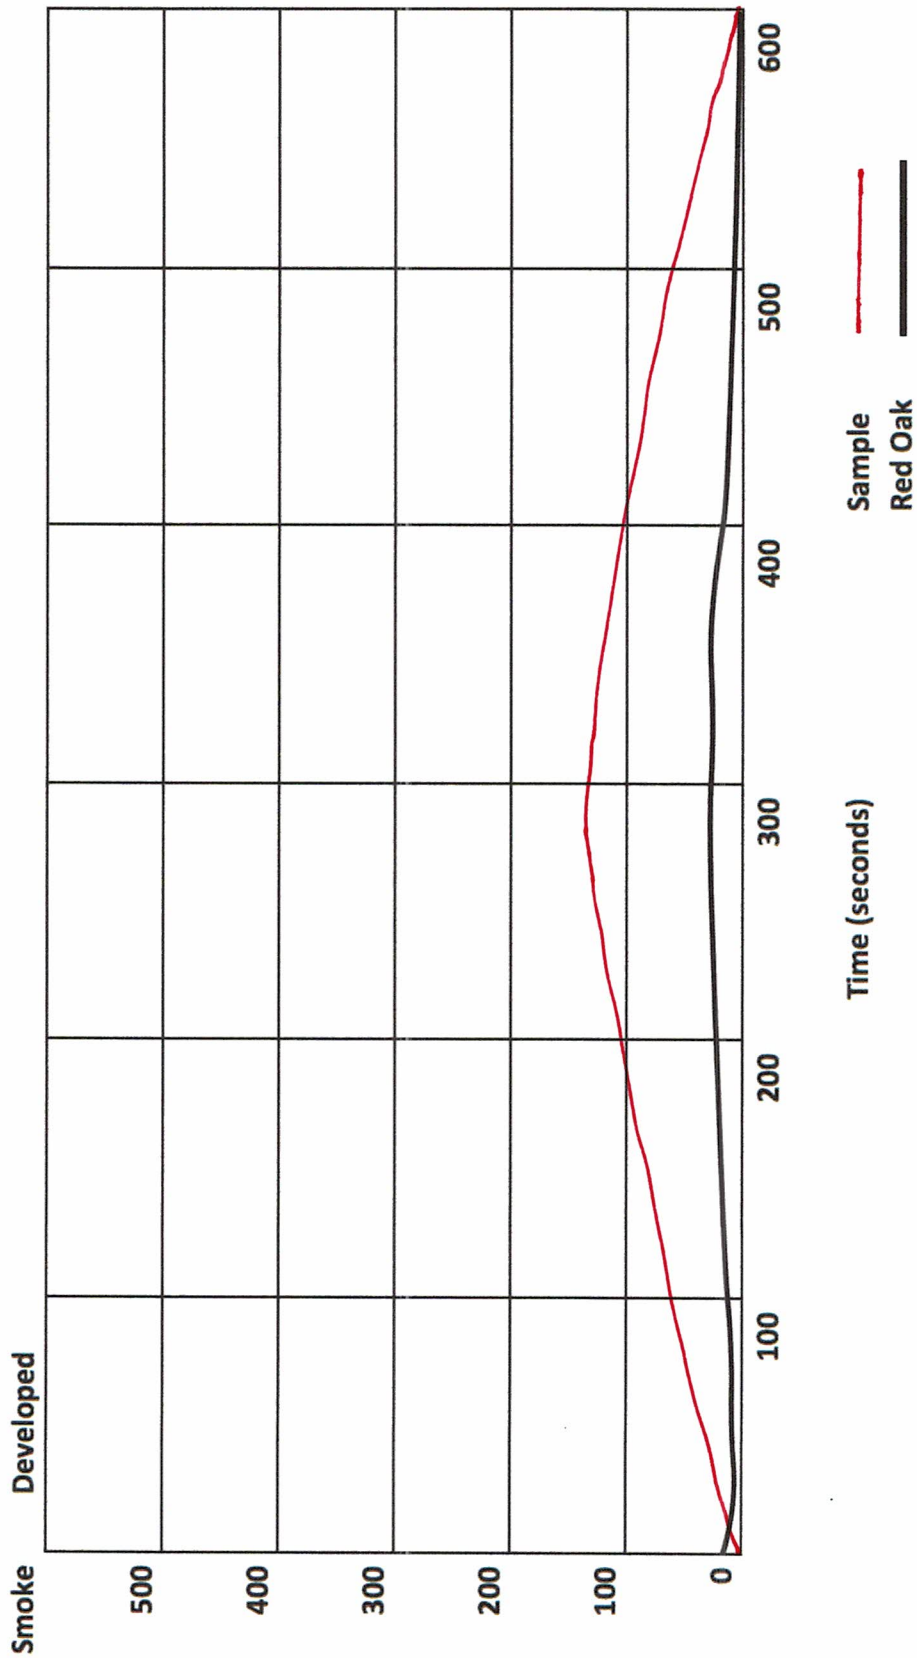

Client: ARTE nv INTERNATIONAL
Report#: 67017-7
Sample: MOOOI (PRINTED NON WOVEN) (MO2011 | MO2021) - ADHERED

